


TRIOPHONI POWER SUPPLY SCHEMATIC
 MODIFIED FROM ELECTRONICS WORLD, JULY, 1958, P. 62

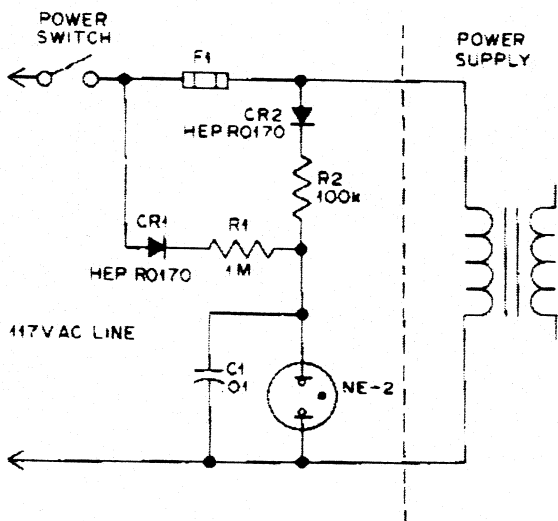

BLOWN-FUSE BLINKER—Neon lamp NE-2 glows steadily when fuse is good and flashes when fuse opens. Flash rate, determined by R1 and C1, is about 10 flashes per second for values shown.—T. Lincoln, A "Smart" Blown-Fuse Indicator, *QST*, March 1977, p 48.

FROM ELECTRONICS PROJECTS READY-REFERENCE
 JOHN MARKUS, MCGRAW-HILL, 1980